



Installation Instructions, LPA768, waterproof connector cover set

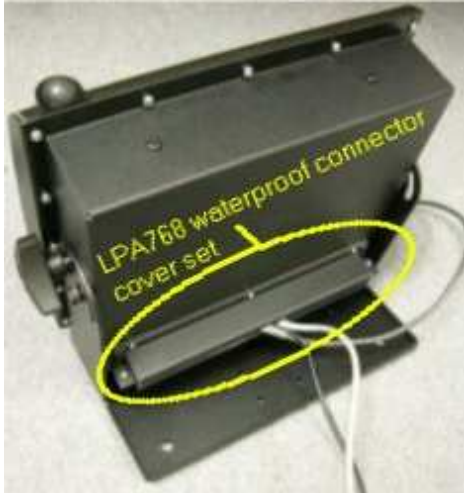

◀ LPA768 provides a waterproof cover and strain relief for cables connected to the LANpoint 7 Data Collection Terminal.

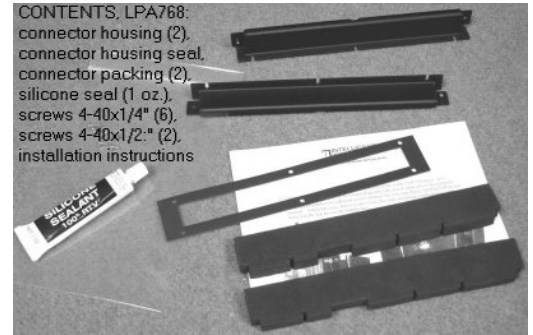

CONTENTS, LPA768:
connector housing (2),
connector housing seal,
connector packing (2),
silicone seal (1 oz.),
screws 4-40x1/4" (6),
screws 4-40x1/2" (2),
installation instructions

▶ LPA768 contains these components



◀ Step 1: Peel & place rubber connector housing seal around connector openings



▶ Step 2: Connect and secure all cables to the terminal and power-up briefly to test all connections; then remove power



◀ Step 3: Optional: if any connectors protrude through terminal housing, the rubber packing material can be trimmed at the bottom edge for best fit




▶ Step 4: Start 6@4-40 x 1/4" connector housing screws; leave very loose; tilt one connector housing bracket into place – whichever one is convenient



◀ Step 5: Squeeze one (1) rubber connector packing in connector openings and housing as shown in main photo. Squeeze 2nd packing on opposite side of cables as shown in inset



▶ Step 6: Rotate 2nd connector housing into place. Adjust in final horizontal position and tighten 3 of the 6 screws

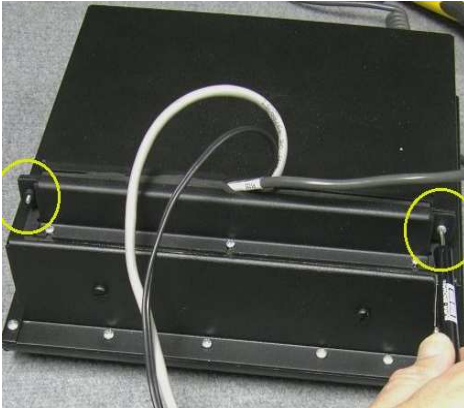

◀ Step 7: Insert both 4-40x1/2" screws between the two connector housings, then tighten as far as desired without damaging cables



▶ Step 8: Tighten the other 3 of the 6 screws



◀ Step 9: Optional: if rubber packing has gaps around cables, use the silicone to seal



▶ Finished: Mount the terminal as desired and route cables